

Profirst Beacons

The Pro-First range of beacons are Reg 10 & Reg 65 approved unless otherwise stated. They have been tried and tested across Europe for several years and have proved to be a great success.



AVS-BEA200

AVS-BEA201



AVS-BEA202



AVS-BEA203



Part numbers:

AVS-BEA200	200 Series LED Beacon Flexi DIN mount 12/24V - REG 10 & Reg 65 approved
AVS-BEA201	200 Series LED Beacon 1 Bolt mount 12/24V - REG 10 & Reg 65 approved
AVS-BEA202	200 Series LED Beacon 3 bolt Mount 12/24V - REG 10 & Reg 65 approved
AVS-BEA203	200 Series LED Beacon Magnetic mount 12/24V - REG 10 & Reg 65 approved - 70mph rated
AVS-BEA200-GRN	200 Series LED Beacon Flexi DIN mount 12/24V with green lens - REG 10 approved
AVS-BEA202-GRN	200 Series LED Beacon 3 bolt Mount 12/24V with green lens - REG 10 approved
AVS-BLNS-G	Green replacement lens for 200 series beacon
AVS-BLNS-A	Amber replacement lens for 200 series beacon

Indexing brackets for mounting beacons



S1181-Y3135

AVS-ABM202

Seat belt kits with green beacons and DIN connectors



The Ashtree **S1181-Y3135** is an indexing arm with a beacon mounting plate with European PCD. The **AVS-ABM202** comes complete with the Ashtree **AVS-BEA202**.

AVS-SBLT100 1150mm long orange 2 point lap belt with electrical connection (fixed)

AVS-SBLT105 1150mm long orange 2 point lap belt with electrical connection (flexible)

The Mighty Atom

The mini light with mighty performance





The TMA series is compact in size and offers a unique solution for restricted access mounting or where product vulnerability might be an issue. Whilst TMA may be small it delivers on lighting performance meeting the stringent ECE Reg 65 lighting regulation. This is achieved by using 18 x 1 watt LED emitters producing an outstanding warning light output.

Part numbers:

- AVS-TMA 200** - Magnetic
- AVS-TMA 100** - DIN
- AVS-TMA 300** - 3 bolt fixing

Specification:

- ECE Reg 65 approved
- Max Current; 1.7amp @12v, 0.85amp @24v
- IP 67 rated
- Reg 10 approved
- 18 LED 1Watt emitter
- Voltage 9-30v
- 5 x Amber flash patterns including rotate, steady burn, double, quad & quint flash

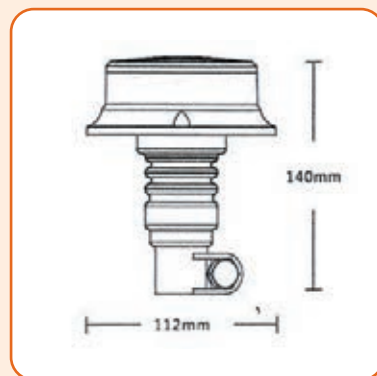

Ashtree DIN Connectors for use with Flexi Din Beacons



AVS-DIN102



AVS-DIN103



AVS-DIN104



AVS-DIN105



AVS-TPD100

Twin pin DIN connector for mounting 2 beacons. Ideal for when and amber and green beacon are required for site safety.



AVS-DIN106



AVS-DIN107



AVS-DIN108

Adjustable DIN connector

AVS Reverse Alarm programme with multiple options

The AVS reverse alarm programme features an industry standard mounting footprint and incorporates the latest warning technology, including traditional Beep Beep , Multi Frequency environmental tones & Programmed speech instruction.

The AVS Alarm programme conforms to the latest Reg 10 approvals and is IP 67 rated, meeting the toughest of demands in the field.



Specification:

- Multi voltage solutions
- Standard 300 mm flying lead
- Options available stud fixing or terminations including Deutsch connectors.
- Speech instructions can be tailor made to customer requirements (small surcharge applies)

Part numbers :

- AVS ALARM100** - 12-100 Volt Reverse Alarm 97dBa
- AVS ALARM200** - 12-24 Volt Reverse Alarm 97dBa Reverse twice
- AVS ALARM300** - 12-24 Volt Multi-frequency Reverse Alarm 88dBa
- AVS ALARM400** - 12-24 Volt Multi-frequency Reverse Alarm 88dBa Reverse twice
- AVS ALARM500** - 12-24 Volt Multi-frequency Reverse Alarm 92dBa
- AVS ALARM600** - 12-24 Volt Talking alarm "Warning this vehicle is reversing"

Economy Range of Work Lamps



AVS-WLRE616

AVS-WLRE616

- L 160 x H 48 x D 61,5mm
- 6LED *3w
- Cree LED
- 1620LM



AVS-WLSQ580

AVS-WLSQ580

- L 85 x H 80 x D 40mm
- 5LED *3w
- Epistar LED
- 800LM



AVS-WLRE690

AVS-WLRE690

- L 110 x H 62 x D 53mm
- 6LED *3w
- Epistar LED
- 900LM



AVS-WLSQ914

AVS-WLSQ914

- L 110 x H 125 x D 55mm
- 9LED *3w
- Epistar LED
- 1400LM



AVS-WLCI914

AVS-WLCI914

- L 110 x H 128 x D 55mm
- 9LED *3w
- Epistar LED
- 1400LM

Standard specification: 10 - 30 volts • Stainless steel bracket • Die Cast aluminium housing
• R10 CE approved • 6500K colour temperature • 1 year warranty



AVS-WLCU990

AVS-WLCU990

- L 50 x H 50
- 9LED 15w
- 900LM



AVS-WLMB1

AVS-WLMB1

- Work light complete with clamp
- Clamp fits 16-28mm diameter pole



AVS-WLMB2

AVS-WLMB2

- Work light complete with clamp
- Clamp fits 16-28mm diameter pole



AVS-SCENE1

AVS-SCENE1

- 4xLED *3w
- IP67 rated
- 10-30 volt
- R10 approved
- 900LM

Used on
Crop
Sprayers



AVS-WLSQ4 Blue

AVS-WLSQ4 Blue

- Blue LED Work Light
- 4LED
- 10-30 volt
- 1200LM

Compact LED Mini Light Bars



R10 & R65 Approved



R10 Approved

Part numbers:

AVS MLB500 - Mini lightbar, single bolt fitting,
R10 & R65 approved with 26 flash patterns

AVS MLB600 - Mini lightbar, magnetic fitting,
R10 & R65 approved with 26 flash patterns

Specification:

- 12-24v
- 26 Flash patterns
- Polycarbonate Lens
- REG 10 REG 65 approved
- IP65
- 30 x 1watt LED's
- Extruded aluminium base
- Two fixings : Magnetic with plug & switch to change flash patterns
- 280mm L x 165mm W x 57mm H

Part numbers:


AVS MLB100 - Mini lightbar, single bolt fitting,
R10 approved with 8 flash patterns

AVS MLB200 - Mini lightbar, magnetic fitting,
R10 approved with 8 flash patterns

Specification:

- 12-24v
- 8 Flash patterns
- Polycarbonate Lens
- REG 10 approved
- IP65
- 24 x 1watt LED's
- Extruded aluminium base
- Two fixings : Magnetic with plug & switch to change flash patterns
- 310mm L x 159mm W x 75mm H

Smart LED Ballast Socket eliminates false alarms

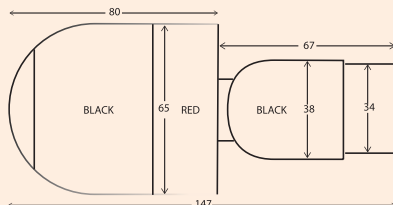

We are pleased to launch our LED ballast socket and plug.

This clever towing socket mimics the load of traditional tail lights to eliminate false bulb failure warnings when using trailers equipped with LED lights.

The unit is of heavy duty construction with the electronics encapsulated in epoxy to protect against water and vibration.



Part number : AVS BAL 1

- Voltage 12 volts
- Eliminates bulb failure warning for trailers with LED lighting
- Mimics the load of normal lights
- Heavy duty construction
- Electronics epoxy encapsulated protecting against water & vibration
- Reg 10 approved



AVS-BALCAM



AVS-SIDCAM



AVS STD CAM



AVS-CCTVEXT10M & 20M



AVS-CCTV300



AVS Part No. AVS-CCTV300

Reversing camera set, 7" monitor (13 pin power), CMOS camera with microphone. 15m, 4 pin cable
3 way video input, 1 way audio, 3 way trigger wire, D type bracket

AVS-MIRRCAM

Mirror arm camera, fits 23-28mm diameter arms. IP68K. Angle 120/90 degrees

AVS-STDCAM

Standard camera, CMOS with microphone, Angle 120 degrees. IP68K

AVS-SIDCAM

Single view camera. IP68K. Angle 120 degrees

AVS-CCTVEXT10M

Extended 4 pin cable 10m

AVS-CCTVEXT20M

Extended 4 pin cable 20m

Heavy Duty E Approved Head Lamp with Indicator

Part numbers:

AVS-ACC108 - Head lamp with indicators -
halogen 24v rear centre mount RH

AVS-ACC109 - Head lamp with indicators -
halogen 24v rear centre mount LH

AVS-ACC110 - Head lamp with indicators -
halogen 12v rear centre mount RH

AVS-ACC111 - Head lamp with indicators -
halogen 12v rear centre mount LH


Specification:

- High / low beam meets ECE R112
- Additional functions: Turn signal, pilot light
- IP66 rated
- Upright version 12 volt only
- Rear bolt mounting 24 volt only
- IP 66 - IP 69K
- Operating temp: -40°C to +85°C
- Salt spray: ISO 9227
- Lens: hardened glass
- Housing: Black fibre reinforced plastic



Y3134


400mm long, 7 core cable with
6 way male Deutsch connector

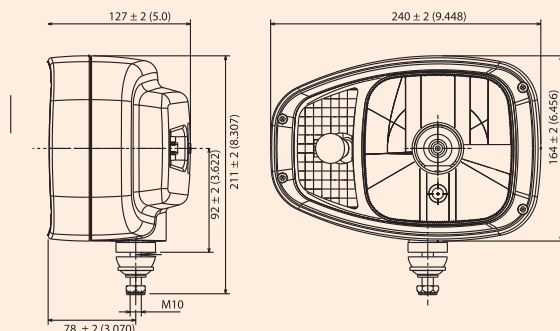

DT 6 way connection



Rear Swivel



Pedestal swivel

are proud to supply:

LIEBHERR



**WACKER
NEUSON**



BUS & COACH




Multihog®



MULAG

Mecalac


MOL

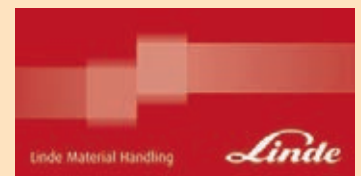

YANMAR



**ALEXANDER
DENNIS**



EGHOLM



Ashtree would like to thank the customers above for permission to use their logos.

Ashtree Works, Brownroyd Street, Bradford, BD8 9AF, UK.

Tel: (0)1274 546732 • Fax: (0)1274 548525

Email: sales@avsuk.co

www.avsuk.co

